



22.

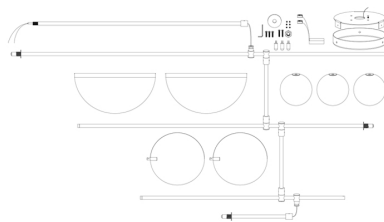

1. Disconnect power.

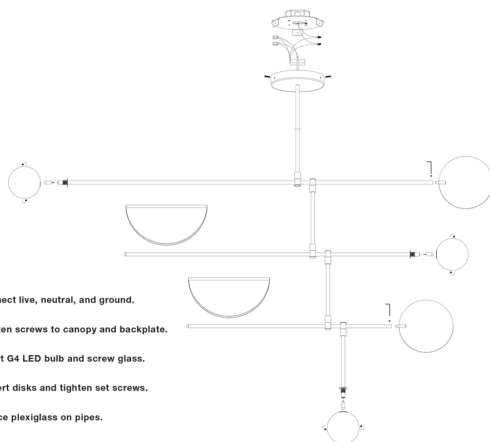


7. Connect live, neutral, and ground.

8. Tighten screws to canopy and backplate.

9. Insert G4 LED bulb and screw glass.

10. Insert disks and tighten set screws.


11. Place plexiglass on pipes.

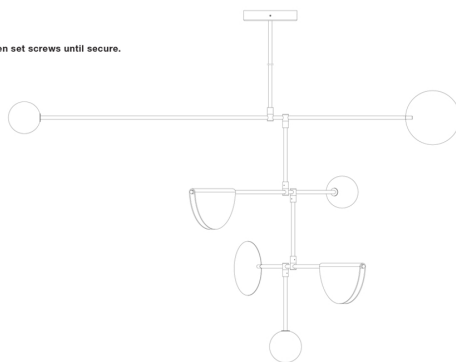

13. Tighten set screws until secure.

lookbook,
instructions.

anony.ca

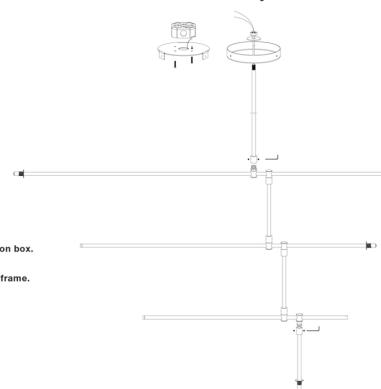


2. Screw backplate to junction box.

3. Connect vertical pipes to frame.

4. Tighten set screws.

5. Attach canopy to pipe.

6. Tighten nut with washer.

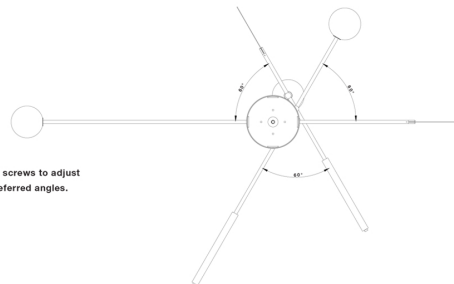

12. Loosen set screws to adjust
arms to preferred angles.

Phase.
Suspension.

installation
instructions.

Installation to be completed by a licensed electrician.

