


FA Series - Wall Mounted Handrail Bracket

NOTES:

- Product specification: FA-WALL-(colour)
- All hardware included
- Minimum 1-1/2" [38 mm] solid wall backing, wood stud or concrete required for wall anchoring
- Rail must be flat on the underside where it comes in contact with each bracket
- Rail anchor can be trimmed down for thinner metal rails
- Centre of wall anchor 2.1" [53 mm] down from rail saddle surface
- Maximum spacing distance 48" o.c. [1220 mm]
- Dimension precision .1
- Wall anchors can be used for both wood (backing) and concrete installation - please inquire
- Longer wall anchors available - please inquire
- Upgraded threaded inserts for hardwood available - please inquire
- Solid metal rails: discard T.W.I and tap rail for 5/16-18 thread. Hollow rails require a threaded insert
- For more info please email info@componance.com or call 1-604-771-5128 9:00am - 5:00 pm (PST)

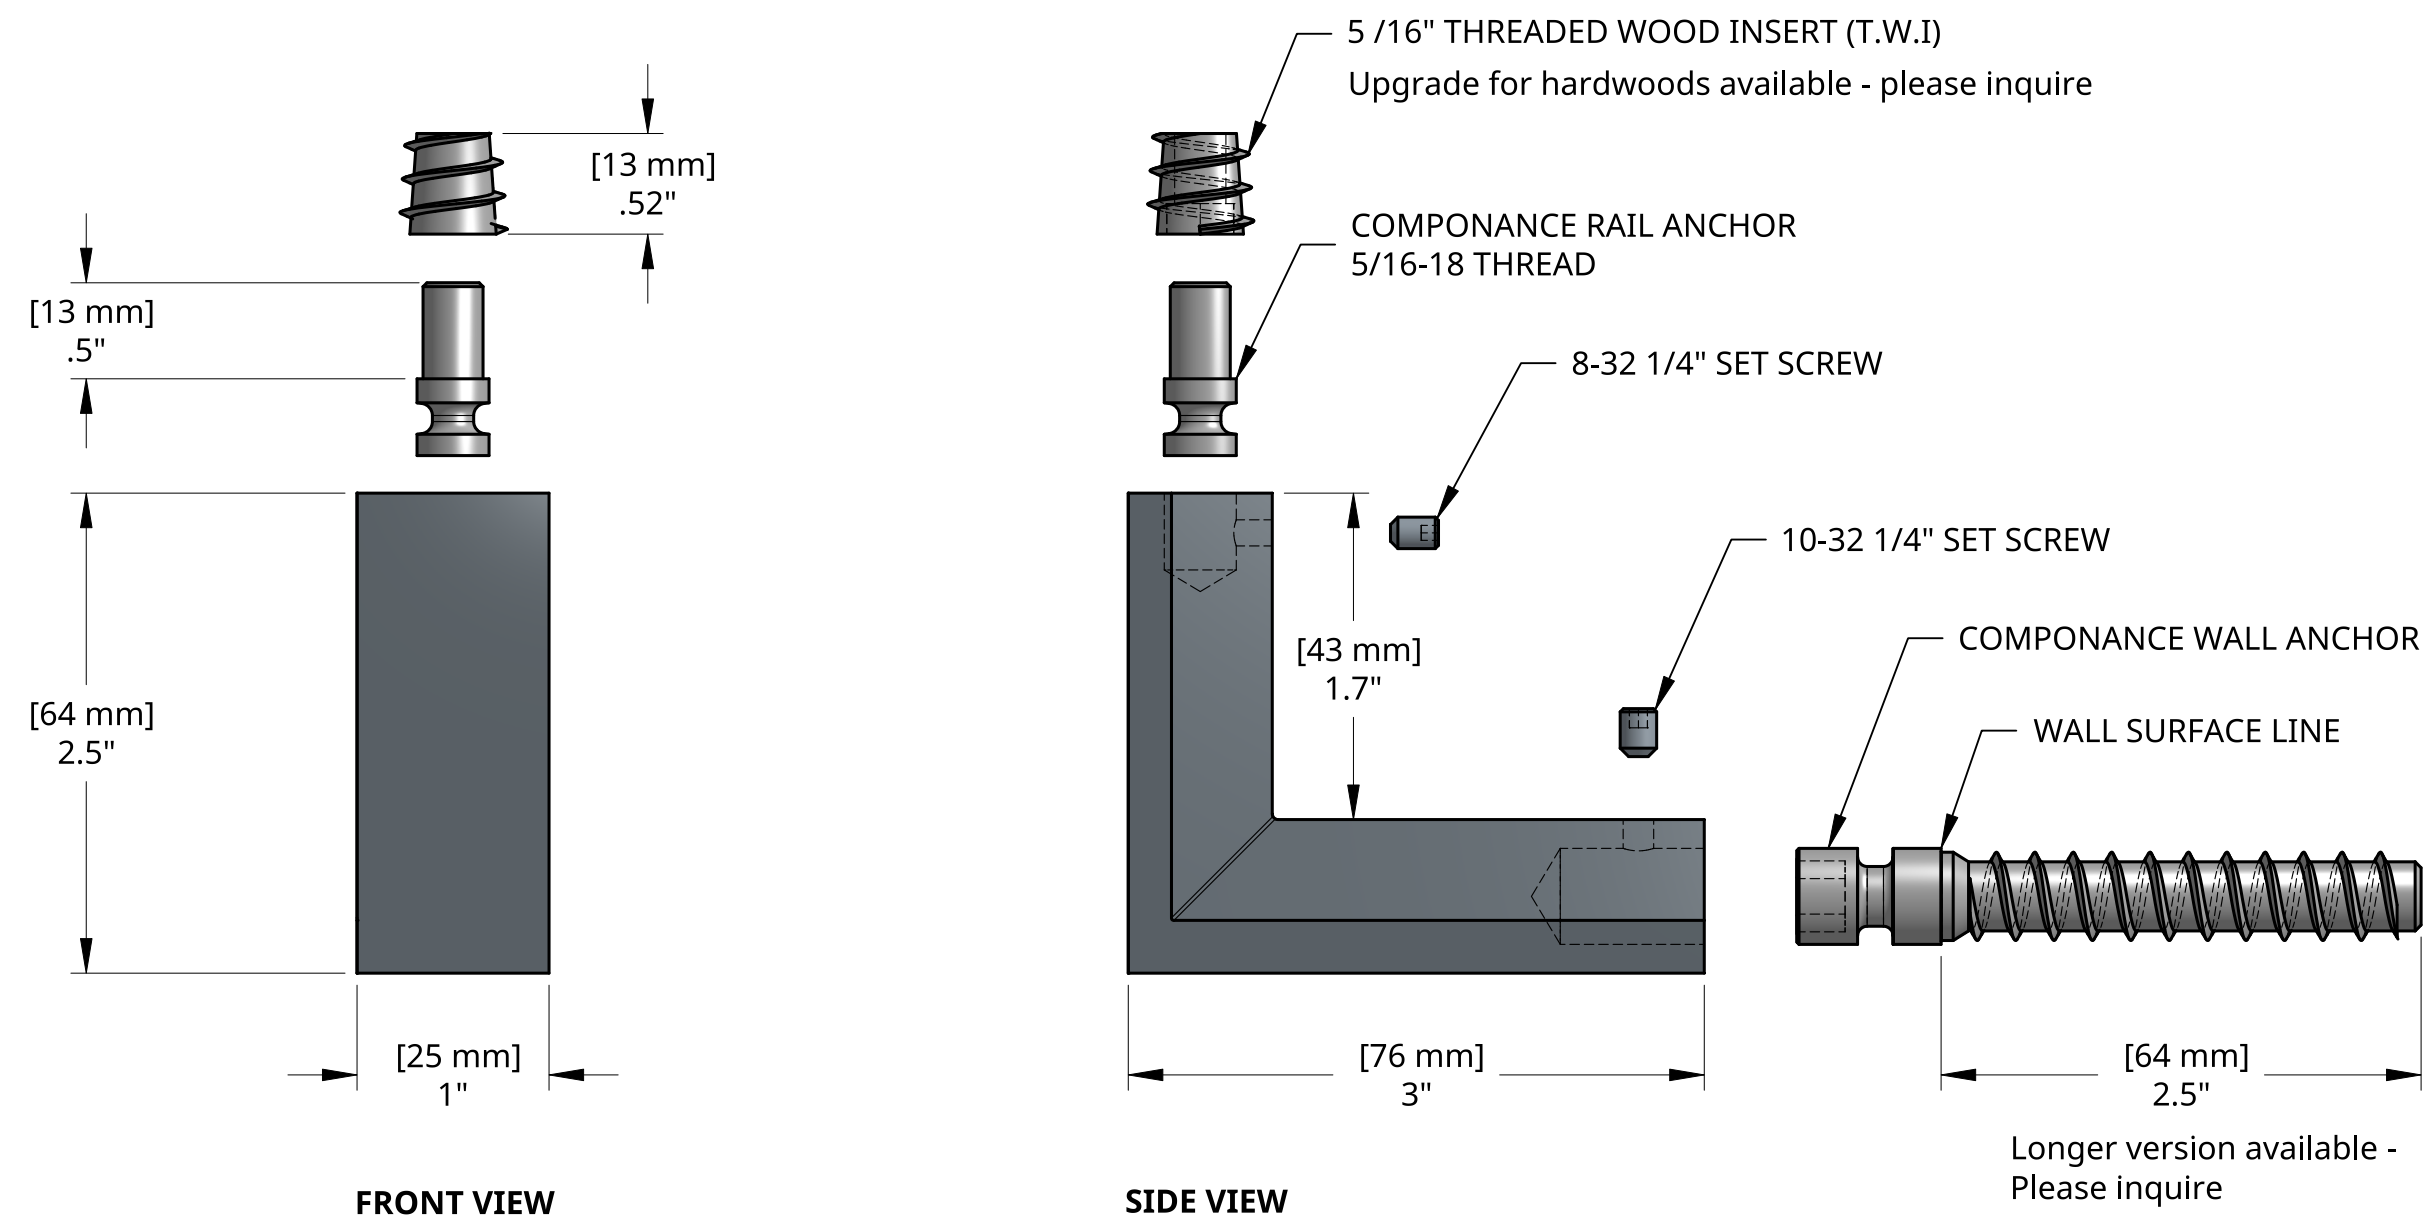

COMPONANCE