

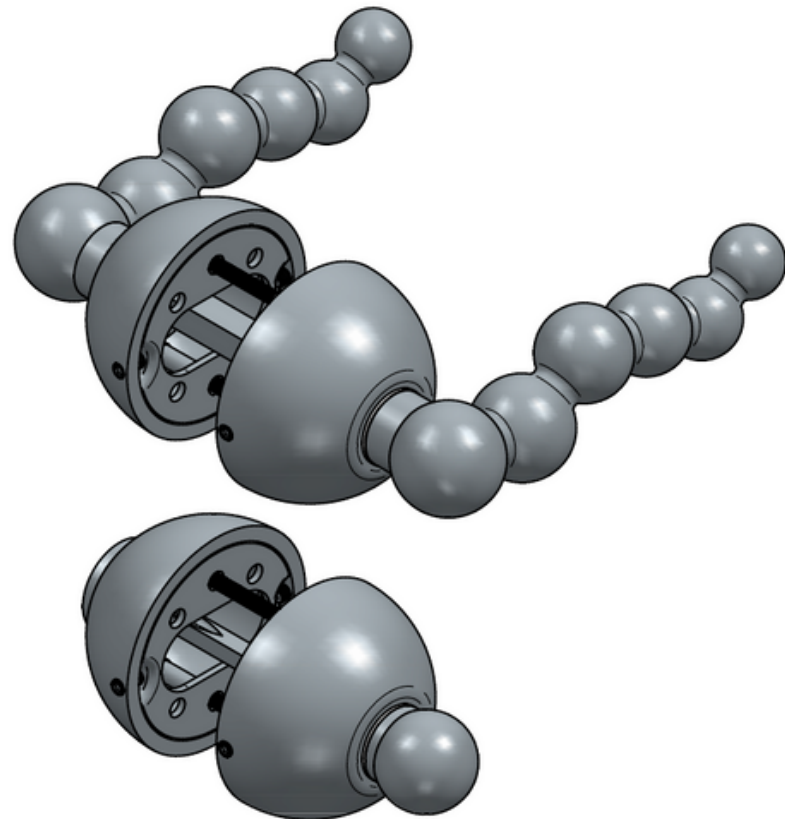
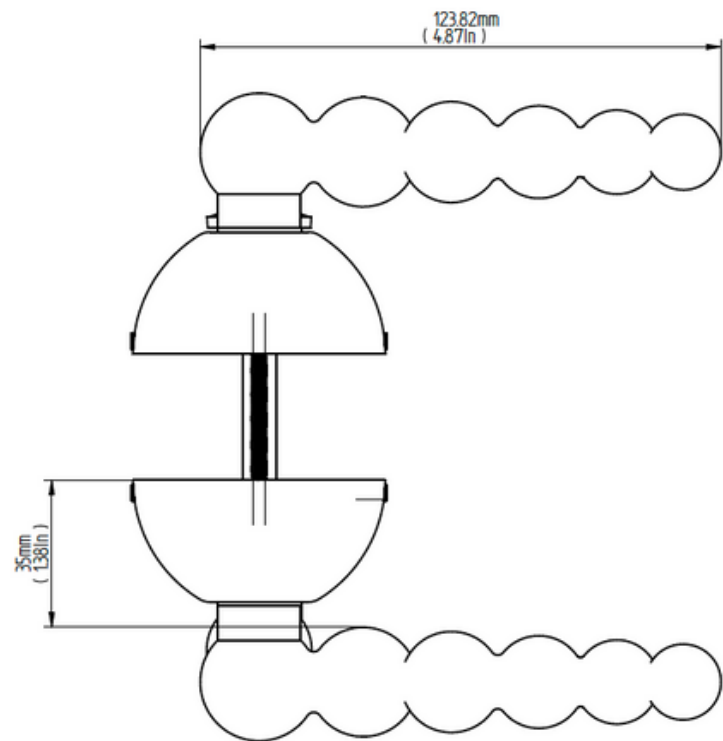
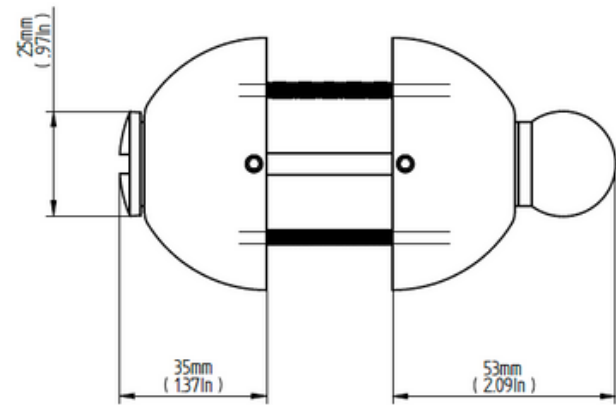
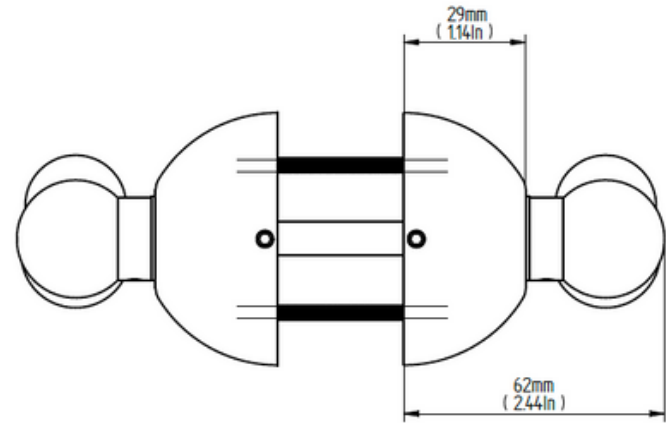


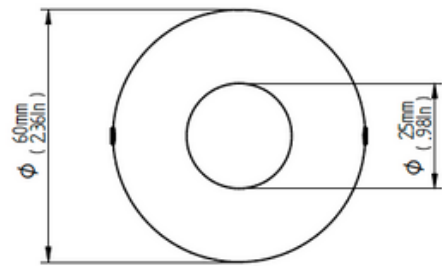

FORME N25-T

FUNCTION: PRIVACY INTERIOR DOOR SET

TYPE	Lever to Lever
	Solid brass
	Inner Parts : Stainless Steel 302 Grade coated with Nickel Plating
	Concealed screws on the interior rosaces / No visible screws
	Compatible with: Rotation latch 28° or standard latch from 45° to 53°
	Fit Door : 1-1/8" to 2" or 29mm to 50mm
To be use with Mortise Lock or Latch	
FINITION	Natural brass / Unlacquered
	Bronze / Lacquered
	Silver Plated
SIZE	
HANDLE	1"x4.35" or 27 x 110mm
PROJECTION	2.35" or 60mm
ROSACE	diameter 2.35" or 60mm
PROJECTION ROSACE	2" or 50mm
SPARE PARTS	
HANDLE SPINDLE	0.3"x0.3"x5" or 8x8x125mm
THUMBTURN SPINDLE	0.2"x0.2"x5" or 5x5x125mm
SPINDLE SLEEVES	Adapter sleeves to convert spindle 8 to 7mm & 5 to 6mm
CONNECTING SCREWS	4 pieces M4
WOODEN SCREWS	8 pieces
GRUB SCREWS	

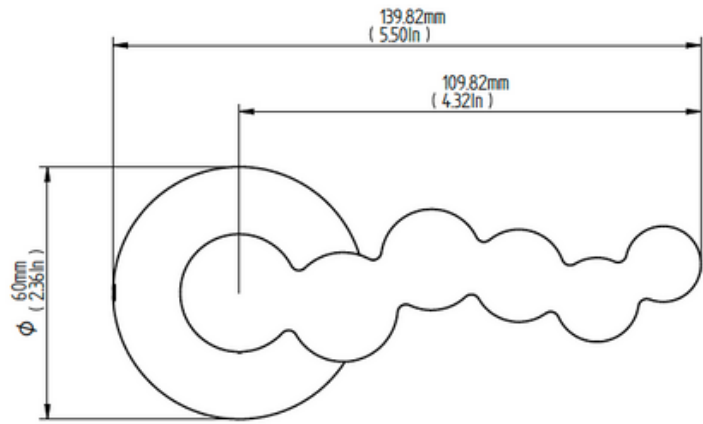

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

	NAME	DATE	Mi&Gei Hardware Studio.	
DRAWN	Schematter	02/06/23		
CHECKED			TITLE	
ENG APPR			Standard Door Preparation	
MGR APPR				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGLES ±X.X° 2 PL ±X.XX 3 PL ±X.XXX			SIZE	REV
			A2	01
			SCALE	WEIGHT
				SHEET 1 OF 1

HANDLE LATCH

FUNCTION: PASSAGE INTERIOR DOOR

82MM



TYPE

Tubular Bolt 8mm Spindle Hub
Backset: 82mm
Field-Reversible Handing

FINITION PLATES

Satin brass
Nickel Plated

SPARE PARTS

1 plate
1 strike plates
4 mounting screws matching finish

60MM



TYPE

Heavy Duty to keep levers from sagging
Tubular Bolt 8mm Spindle Hub
Double Spring
Backset: 60mm
Field-Reversible Handing

FINITION PLATES

Satin brass
Nickel Plated

SPARE PARTS

1 plate
1 strike plates
4 mounting screws matching finish

THUMBTURN LATCH

FUNCTION: PRIVACY INTERIOR DOOR

82MM



TYPE

Tubular Bolt 8mm Hub Spindle
Backset: 82mm
Field-Reversible Handing


FINITION PLATES

Satin brass
Nickel Plated

SPARE PARTS

1 face plate
1 strike plate
4 mounting screws matching finish
Dust Box

60MM

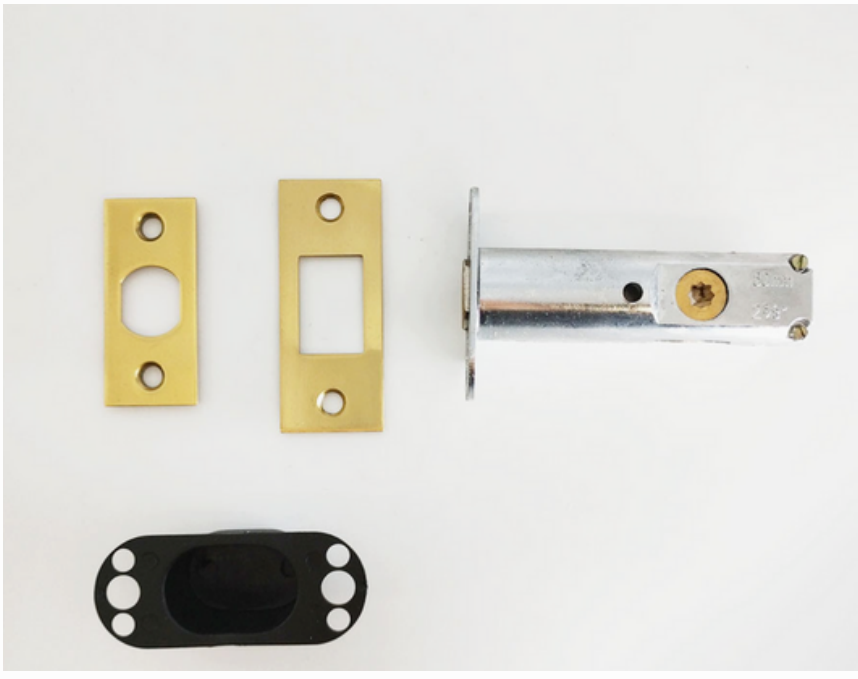

TYPE

Heavy Duty to keep levers from sagging
Tubular Bolt 8mm Hub Spindle
Double Spring
Backset: 60mm
Field-Reversible Handing

FINITION PLATES

Satin brass
Nickel Plated


SPARE PARTS

1 face plate
1 strike plate
4 mounting screws matching finish
Dust Box

FOR RENOVATION PROJECT CONTACT US customerhappiness@miandgei.com

DOOR PREPARATION

PRIVACY INTERIOR DOOR

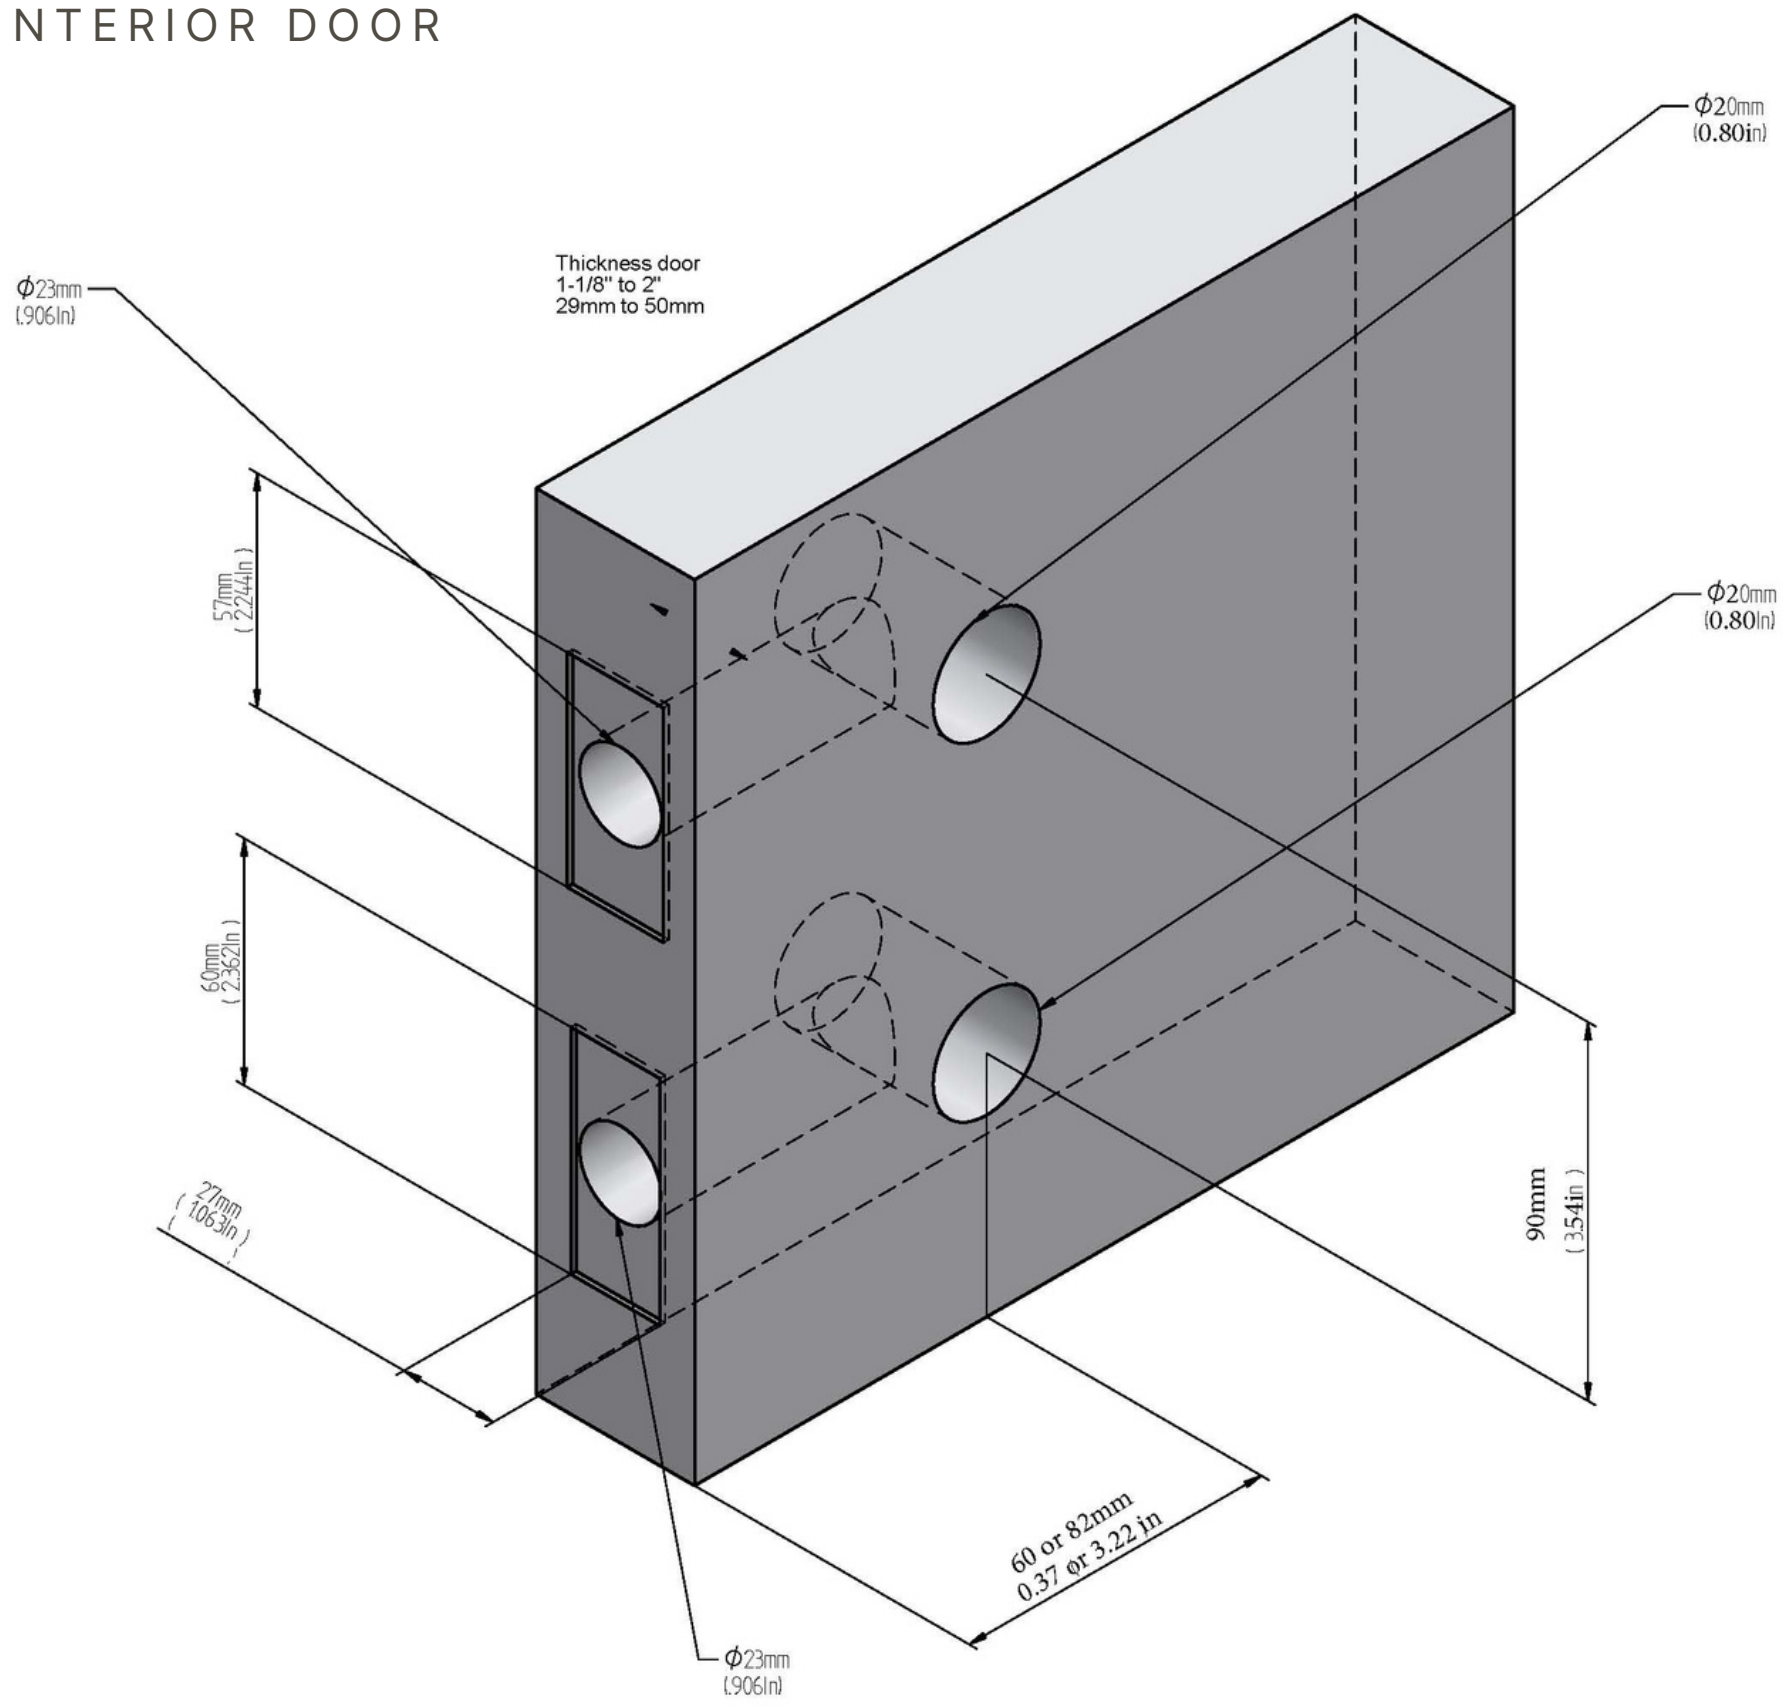


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

	NAME	DATE	Mi&Gei Hardware Studio		
DRAWN	Schematter	02/06/23			
CHECKED			TITLE Standard Door Preparation		
ENG APPR					
MGR APPR			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGLES ±XX° 2 PL ±XXX 3 PL ±XXXX		
SIZE A2	DWG NO 01		REV		
SCALE		WEIGHT		SHEET 1 OF 1	

PRIVACY MORTISE LOCK

FUNCTION: PRIVACY INTERIOR DOOR

AUSTRALIA

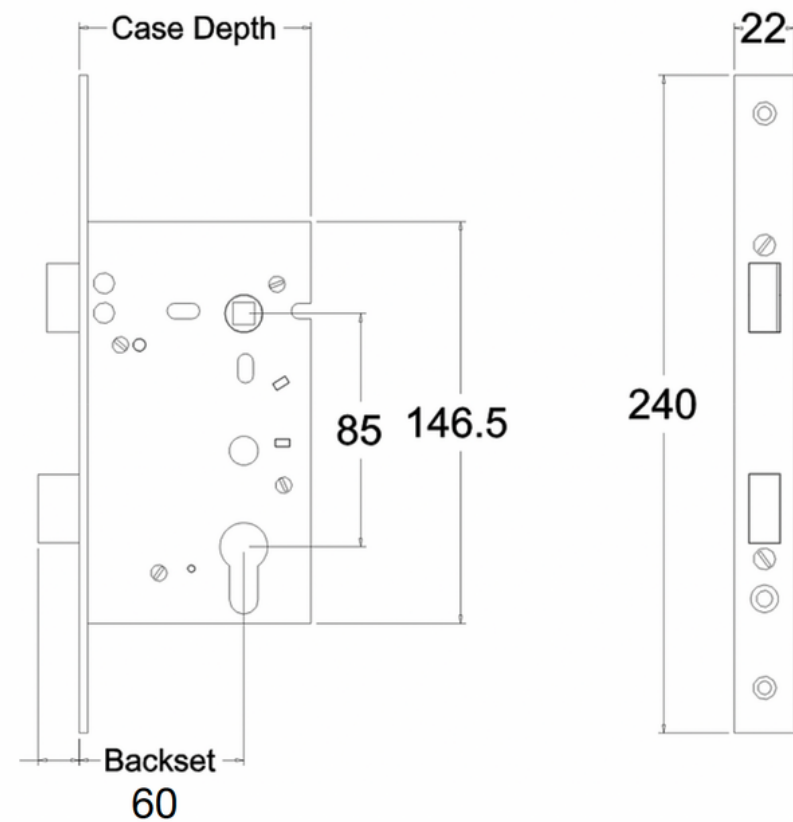

BRAND COMPTABILITY

Jacksons JMCL60PVT

Door Thickness 29-50mm


Standard Backset 60mm

Lock Spacing (entraxe) 85mm

Spindle Handle 8mm

Spindle Thumbturn 5-6mm (we supply the sleeve adapters to convert 6 to 5mm)

FRANCE

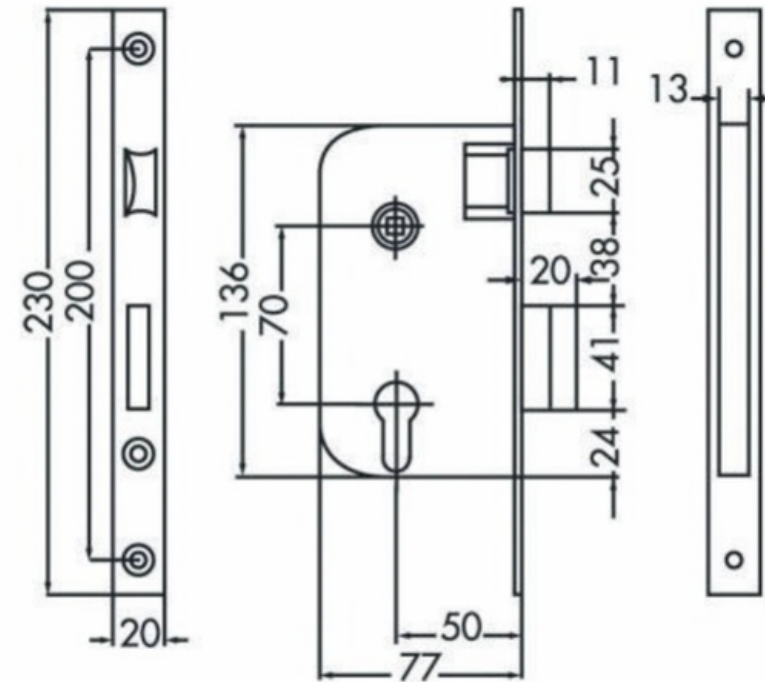

BRAND COMPTABILITY

Thirard France ref. 00494330

JPM France ref: MULTIBAT

Door Thickness 29 to 50mm

Standard Backset 40 to 80mm

Lock Spacing (entraxe) 70mm

Spindle Handle 7mm (we supply the sleeve adapters to convert 8 to 7mm)

Spindle Thumbturn 6mm (we supply the sleeve adapters to convert 6 to 5mm)

FOR RENOVATION PROJECT CONTACT US

customerhappiness@miandgei.com



CONTACT US

E-mail	customerhappiness@miandgei.com
Website	www.miandgei.com
Phone	+1-347-745-1401 USA +33 7 84 21 68 87 France
Follow us	@miandgeihardware